


CONCRETE IS THE OPTIMUM SELECTION IN TERMS OF MAINTENANCE, COST, AND STABILITY



WATER CHARACTERISTICS



COMFORT




SEAKEEPING



STRUCTURE

FACTORS INFLUENCING THE SIZE OF VLFS

RECYCLING OF CONTAINERS AS STUDENT HOUSING

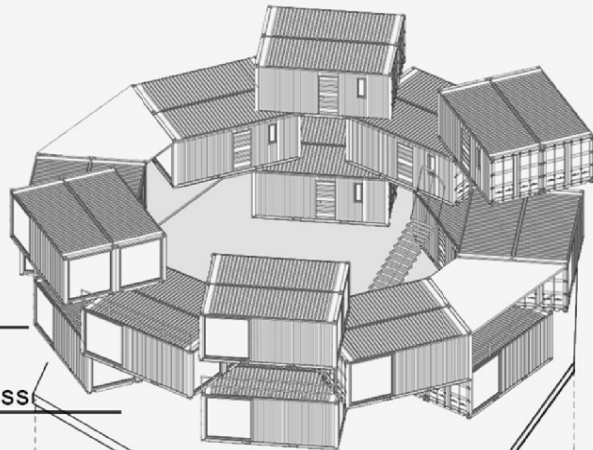

CONTAINERS

FLOOR THICKNESS

50_{CM}

WALL THICKNESS

30_{CM}

WALL THICKNESS

50_{CM}

WALL THICKNESS


50_{CM}

FLOOR THICKNESS

50_{CM}

WALL THICKNESS

50_{CM}

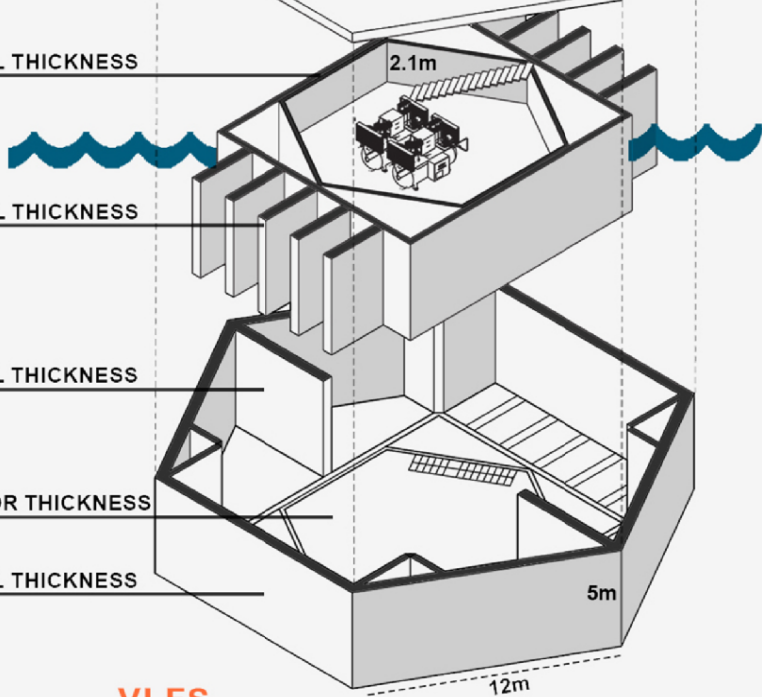

VLFS

FLOATING STRUCTURES FOR TACKLING SEA LEVEL RISE IMPACTS